

GLAND ACCESSORIES 06

ADAPTOR

FLAMEPROOF
ZONE 1,2,21,22





SPECIFICATION

TYPE	Adaptor type 600
APPLICATION	Adaptors convert an existing cable entry to larger thread form size.
HAZARDOUS AREA ZONE	Zone 1 - Zone 2 (Gas) Zone 21 - Zone 22 (Dust)
MARKING	Ex d IIC Gb Ex e IIC Gb Ex t IIIC Db
STANDARDS	EN60079-0 EN60079-1 EN60079-7 EN60079-31
EU-TYPE EXAMINATION CERTIFICATE NO.	TÜV 11 ATEX 7156 X
INGRESS PROTECTION	IP66
MATERIAL	Brass or Stainless Steel
FINISH	Nickel Plating (for brass)
OPERATING CONDITION	Indoor/Out door
ORDERING DETAILS	Sealing Washer Locknut

DIMENSIONS (MM)

MALE	FEMALE	ACROSS CORNER	ACROSS FLAT (MIN)
M16	M20	26.6	24.0
M20	M25	33.3	30.0
M25	M32	39.9	36.0
M32	M40	49.9	44.0
M40	M50	61.0	55.0
M50	M63	77.6	68.0
M63	M75	90.3	80.0
M75	M90	113.0	100.0

* For other thread forms, equivalent thread size corresponding to ISO metric should be used

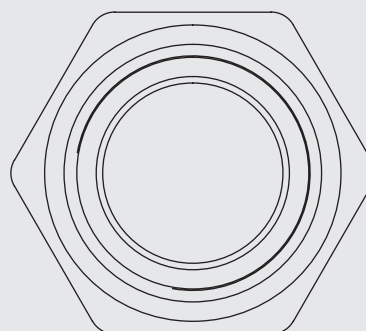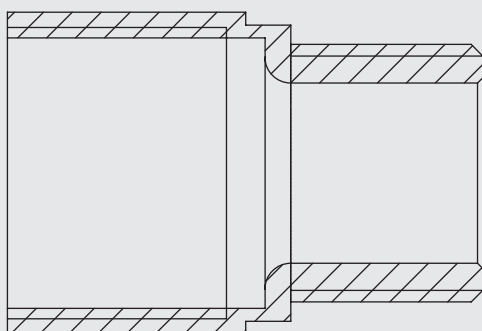

GLAND ACCESSORIES 06

REDUCER

FLAMEPROOF
ZONE 1,2,21,22



SPECIFICATION

TYPE	Adaptor type 700
APPLICATION	Reducers convert an existing cable entry to smaller thread form size.
HAZARDOUS AREA ZONE	Zone 1 - Zone 2 (Gas) Zone 21 - Zone 22 (Dust)
MARKING	Ex II 2 G D Ex d IIC Gb Ex e IIC Gb Ex t IIIC Db
STANDARDS	EN60079-0 EN60079-1 EN60079-7 EN60079-31
EU-TYPE EXAMINATION CERTIFICATE NO.	TÜV 11 ATEX 7156 X
INGRESS PROTECTION	IP66
MATERIAL	Brass or Stainless Steel
FINISH	Nickel Plating (for brass)
OPERATING CONDITION	Indoor/Out door
ORDERING DETAILS	Sealing Washer Locknut

DIMENSIONS (MM)

MALE	FEMALE	ACROSS CORNER	ACROSS FLAT (MIN)
M20	M16	26.6	24.0
M25	M20	33.3	30.0
M32	M25	39.9	36.0
M40	M32	49.9	44.0
M50	M40	61.0	55.0
M63	M50	77.6	68.0
M75	M63	90.3	80.0
M90	M75	113.0	100.0

* For other thread forms, equivalent thread size corresponding to ISO metric should be used

