


- . Frequency Range : 20 KHz – 65 KHz
- . Absorbed Power : 3 Watts
- . Power Supply : 90 – 250 V AC, 50Hz/60Hz
- . Ultrasound Pressure : 140 dB
- . It Protects a Volume of about 300 Cubic Meter

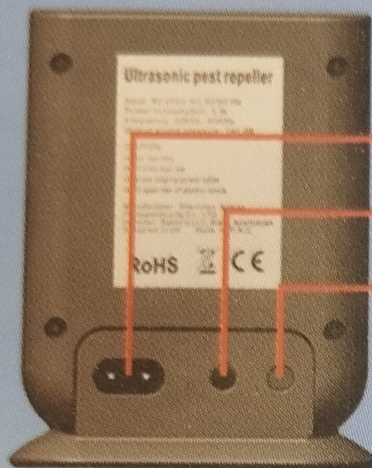



Power connector

Frequency adjustment

Test button

Caution:

1. Do not place Frequency Conversion Ultrasonic Mouse Repeller on carpeted surface, behind furniture draperies or other soft objects as the will absorb the sound waves.
2. Do not place Frequency Conversion Ultrasonic Mouse Repeller nest to your ear before performing this check.
3. Do not use outdoors or let the unit come in contact with water.



Designed by GoodLife in Oregon, USA - Assembled in China 2017 GoodLife, LLC