


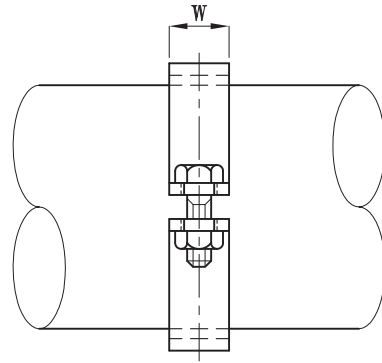
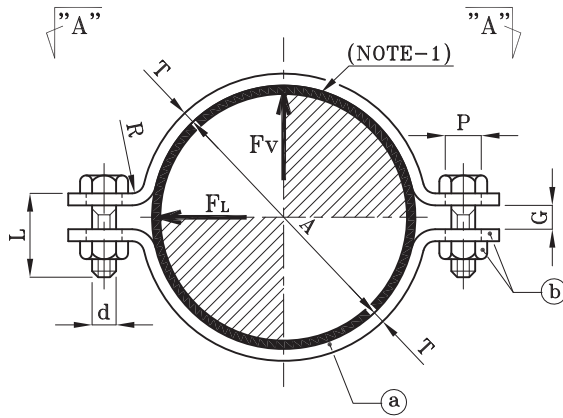


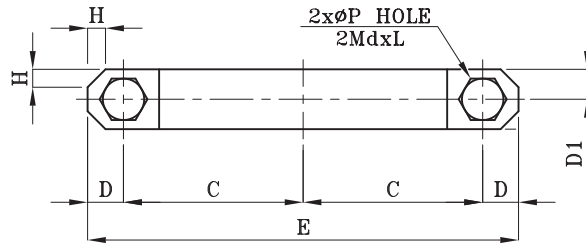


1/2" TO 8"

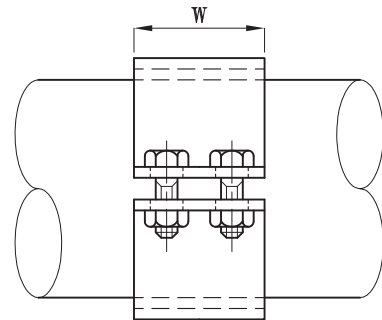

VIEW "A" ~ "A"

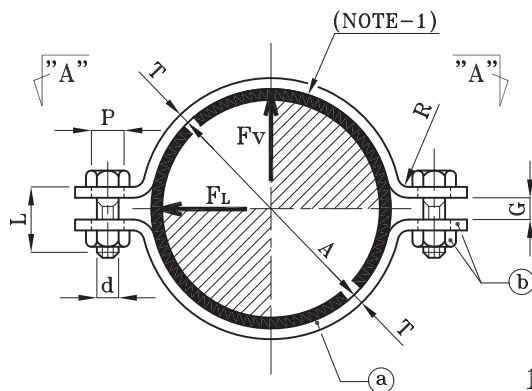

10" & 42"

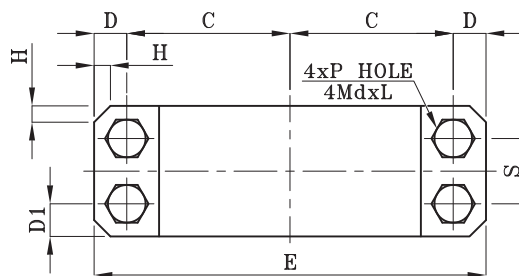

VIEW "A" ~ "A"

INDICATION:

SK-01 -

(1)	(2)

1-MATERIAL MARK
2-NPS MARK

NOTE:

1- FOR AS, SS, LTCS AND GALVANIZED PIPES, ANTI CORROSION TAPE SHALL BE APPLIED BETWEEN PIPE AND CLAMP.

FOR RUN PIPE WITH TEMP. MORE THAN 350°, THIN STAINLESS STEEL OR ALLOY STEEL SHEET WITH THICKNESS 0.5mm CAN BE USED AS AN ANTI CORROSION ITEM.

SUPPORT DESCRIPTION:

SIMPLE CLAMP

1/2" ~ 42"

SK-01

DOC. CODE:

Rev.

07

SHEET

1

2

PAGE

378

397

NPS MARK: (2)

NPS MARK	RUN PIPE SIZE	CLAMP BODY												MACHINE BOLT MdxL	ALLOWABLE LOAD (kg)	
		A	C	D	E	G	H	D1	S	P	R	W	T		F _L	F _v
0A	1/2"	24	25	15	80	15	5	15	0	12	10	30	5	M10x45	150	170
0B	3/4"	29	30	15	90	15	5	15	0	12	10	30	5	M10x45		
01	1"	36	35	15	100	15	5	20	0	12	10	40	5	M10x45		
1A	1 1/2"	51	50	15	130	15	5	20	0	12	10	40	5	M10x45		
02	2"	63	55	15	140	15	5	20	0	16	10	40	8	M14x55	230	400
2A	2 1/2"	76	65	15	160	15	5	20	0	16	10	40	8	M14x55		
03	3"	92	75	15	180	15	5	20	0	16	10	40	8	M14x55		
04	4"	118	95	25	240	25	10	25	0	22	10	50	10	M20x75	350	560
05	5"	146	115	25	280	25	10	25	0	22	10	50	10	M20x75		
06	6"	173	140	35	350	35	10	40	0	22	15	80	12	M20x90	500	1000
08	8"	225	165	35	400	35	10	40	0	22	15	80	12	M20x90		1800
10	10"	280	205	40	490	40	10	25	50	18	20	100	15	M16x100		
12	12"	330	230	40	540	40	10	25	50	18	20	100	15	M16x100		
14	14"	362	260	50	620	50	15	25	50	18	25	100	15	M16x110		
16	16"	414	285	50	670	50	15	30	60	18	25	120	15	M16x110		
18	18"	464	310	50	720	50	15	30	60	18	25	120	15	M16x110	600	3000
20	20"	514	350	50	800	50	15	35	60	22	30	130	20	M20x120		
22	22"	566	375	50	850	50	15	35	60	22	30	130	20	M20x120		
24	24"	616	400	50	900	50	15	35	60	22	30	130	20	M20x120		
26	26"	668	440	55	990	55	20	50	80	22	35	180	25	M20x140		
28	28"	720	465	55	1040	55	20	50	80	22	35	180	25	M20x140		
30	30"	770	490	55	1090	55	20	50	80	22	35	180	25	M20x140		
32	32"	824	515	55	1140	55	20	50	80	22	40	180	25	M20x140		
34	34"	876	540	55	1190	55	20	45	90	26	40	180	25	M24x140	800	4300
36	36"	928	570	55	1250	55	20	45	90	26	40	180	25	M24x140		
38	38"	979	595	55	1300	55	20	45	90	26	40	180	25	M24x140		
40	40"	1030	620	55	1350	55	20	45	90	26	40	180	25	M24x140		
42	42"	1080	645	55	1400	55	20	45	90	26	40	180	25	M24x140		

MATERIAL MARK:(1)

DES. TEMP	MATERIAL OF RUN PIPE MEMBER	CARBON STEEL	ALLOY STEEL	STAINLESS STEEL
	MARK	A	D	G
0°C TO 350°C	MARK	A	D	G
	(a)	A283 Gr.C	A283 Gr.C	A283 Gr.C
	(b)	A325	A325	A325
	(c)	—	—	—
350°C TO 400°C	MARK	B	E	H
	(a)	A285 Gr.C	A285 Gr.C	A285 Gr.C
	(b)	A325	A325	A325
	(c)	—	—	—
400°C TO 550°C	MARK	C	F	J
	(a)	—	A387 Gr.91 CL.2	A240 Gr.316
	(b)	—	A193 Gr.B16	A193 Gr.B8CL.1
	(c)	—	—	—

INDICATION:

SK-01-

(1) (2)

1-MATERIAL MARK
2-NPS MARK

NOTE:

SUPPORT DESCRIPTION: SIMPLE CLAMP 1/2" ~ 42" SK-01	Rev.
	06
	SHEET
	2
	2
DOC. CODE:	PAGE
	379
	397